


Heavy duty connector HE series 24 poles



工作电流: 16A
工作电压: 400/500V
阻燃等级(据UL94): V0
防护等级: IP65
接线形式: 螺钉压接
 弹片压接
 冷压针压接
电缆入口可选螺纹:
 PG21, PG29, M32
Rated current: 16A
Rated voltage: 400/500V
Flammability acc. to UL94: V0
Degree of protection acc. to
DIN40 050: IP65
Terminal: Screw terminal
 Spring terminal
 Crimp terminal
Thread: PG21, PG29, M32

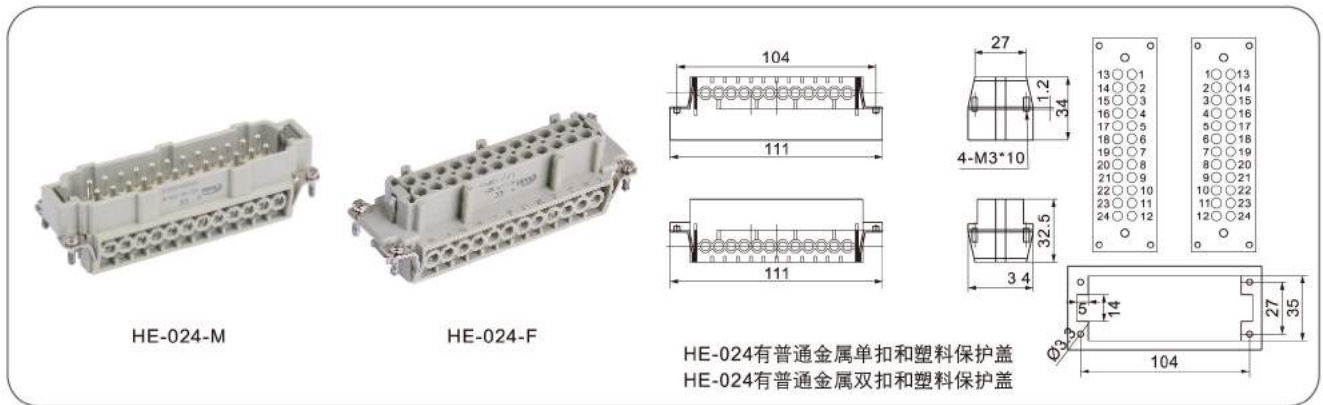

Hood & Housing

H24B 上壳 H24B hood	螺纹 Thread	型号 Type	图纸 Drawing
----------------------	--------------	------------	---------------

外壳上壳: 侧面进线
Hood: Side entry



外壳上壳: 顶部进线
Hood: Top entry




H24B 上壳/底座 H24B hood/housing	螺纹 Thread	型号 Type	图纸 Drawing
---------------------------------	--------------	------------	---------------

外壳上壳: 顶部进线
Hood: Top entry



外壳底座: 开孔安装
Bulkhead: mounted

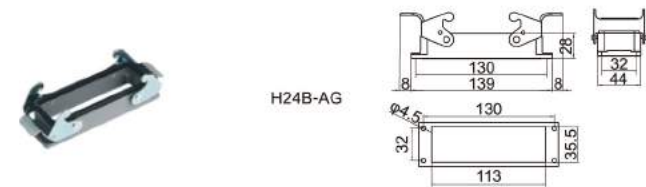

外壳底座: 表面安装
Surface mounted: Side entry



4耳带盖底座
Bulkhead mounted with 2 bolts



Hood & Housing





H24B 上壳
H24B hood

螺纹
Thread

型号
Type

图纸
Drawing

外壳上壳:侧面进线
Hood: Side entry

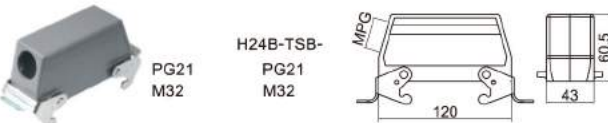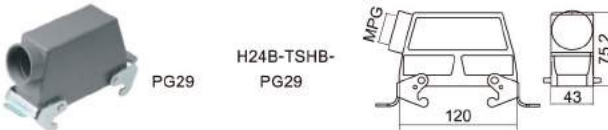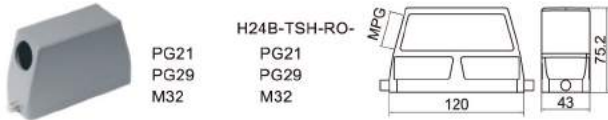







H24B 上壳
H24B hood

螺纹
Thread

型号
Type

图纸
Drawing

外壳上壳:顶部进线
Hood: Top entry

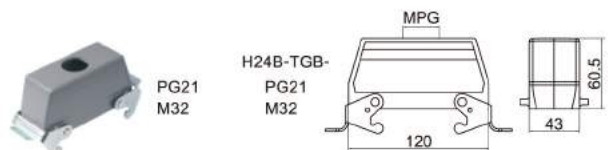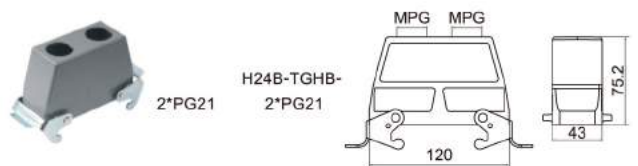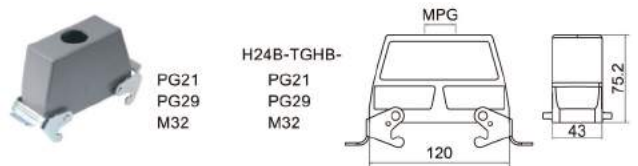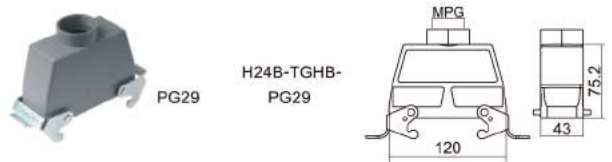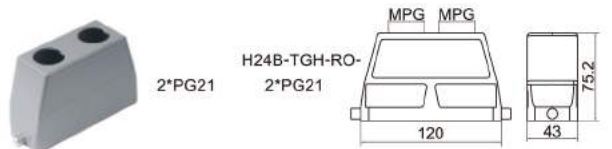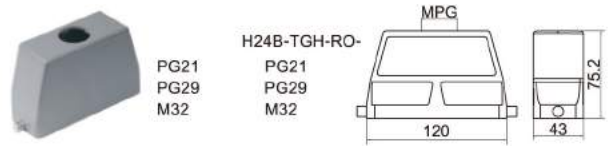

外壳上壳:顶部进线
Hood: Top entry

